



Rating	15A 125V AC 10A 250V AC
Contact resistance	50mΩ Max
Insulation resistance	DC 500V 100MΩ Min
Dielectric strength	AC 1500V 1 minute
Cut-out	



FEATURES

- * MATERIAL: Metal lever and bushing are nickel plated metal. Frame is metal plated steel. Terminals are nickel plated brass. Base is phenolic.
- * Standard toggle lever.
- * Indicator plate, waterproof boot, safety cover and connector are optional.

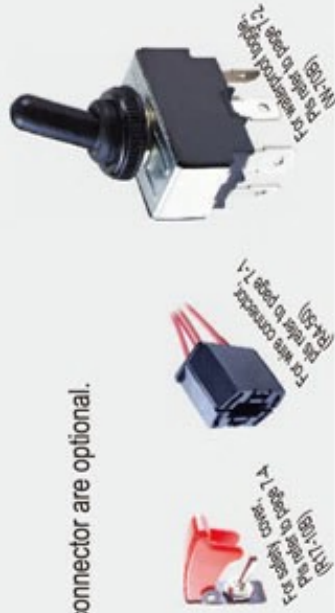

R13-28

FUNCTION		TERMINAL
A	<p>2P SPST ON/OFF</p>	0 1 .250" SQ
B	<p>6P DPDT ON/OFF</p>	0 5 SO
C	<p>3P SPDT ON/OFF</p>	0 6 SC 3
D	<p>3P SPDT ON/OFF</p>	0 7 SC 4
E	<p>6P DPDT ON/OFF</p>	
F	<p>4P DPST ON/OFF</p>	
G	<p>3P SPDT ON/OFF</p>	
H	<p>3P SPDT ON/OFF</p>	
I	<p>3P SPDT ON/OFF</p>	
J	<p>6P DPDT ON/OFF</p>	
K	<p>6P DPDT ON/OFF</p>	
L	<p>6P DPDT ON/OFF</p>	
M	<p>6P DPDT ON/OFF</p>	
N	<p>6P DPDT ON/OFF</p>	
O	<p>6P DPDT ON/OFF</p>	
P	<p>6P DPDT ON/OFF</p>	

* () = momentary