

∅ 12.2


6 mm max

21A 14V DC

FEATURES

\* Watertight boot (W-72) is optional for lever #1 (refer page 85).


FUNCTION

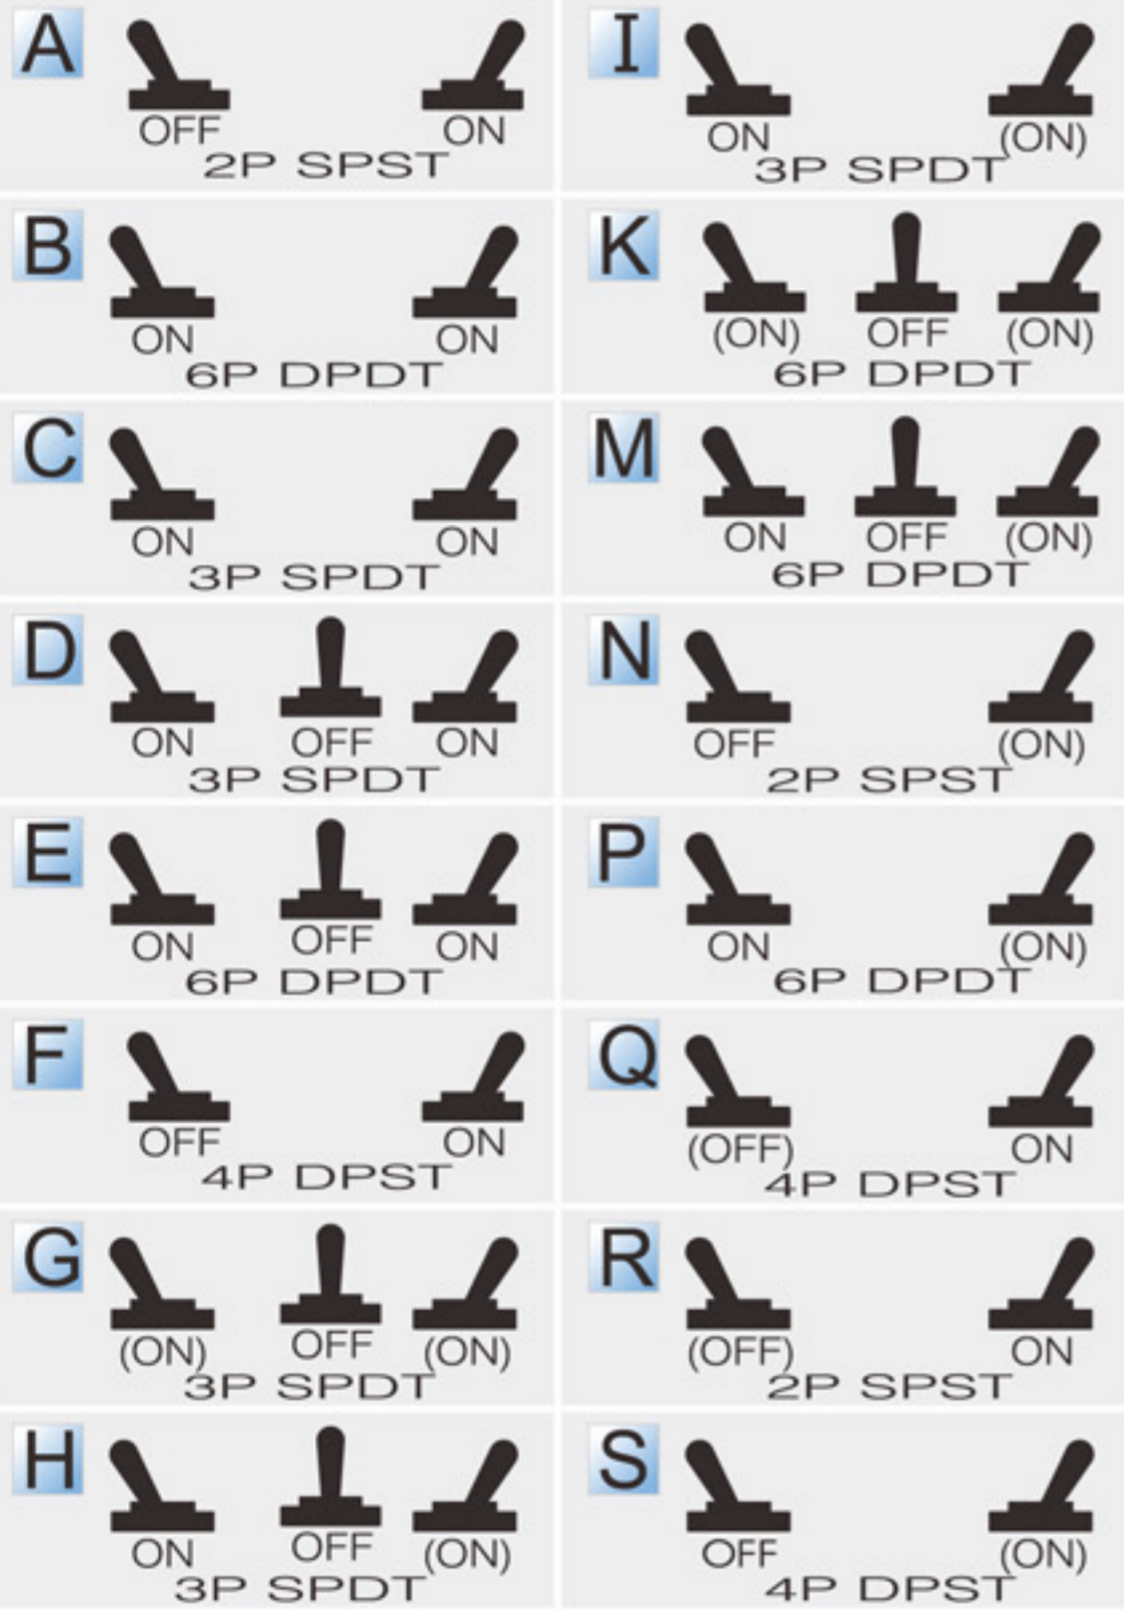

TERMINAL


- 0 1 .250" SQ
- 0 4 SAE SQ
- 0 5 SO
- 0 6 SC M3
- 0 7 SC M4
- 0 8 SC 6-32UNC
- 1 1 WIRE
- 1 3 .187" SQ

TERMINAL POSITION OF A,F,N,S,R,Q FUNCTIONS

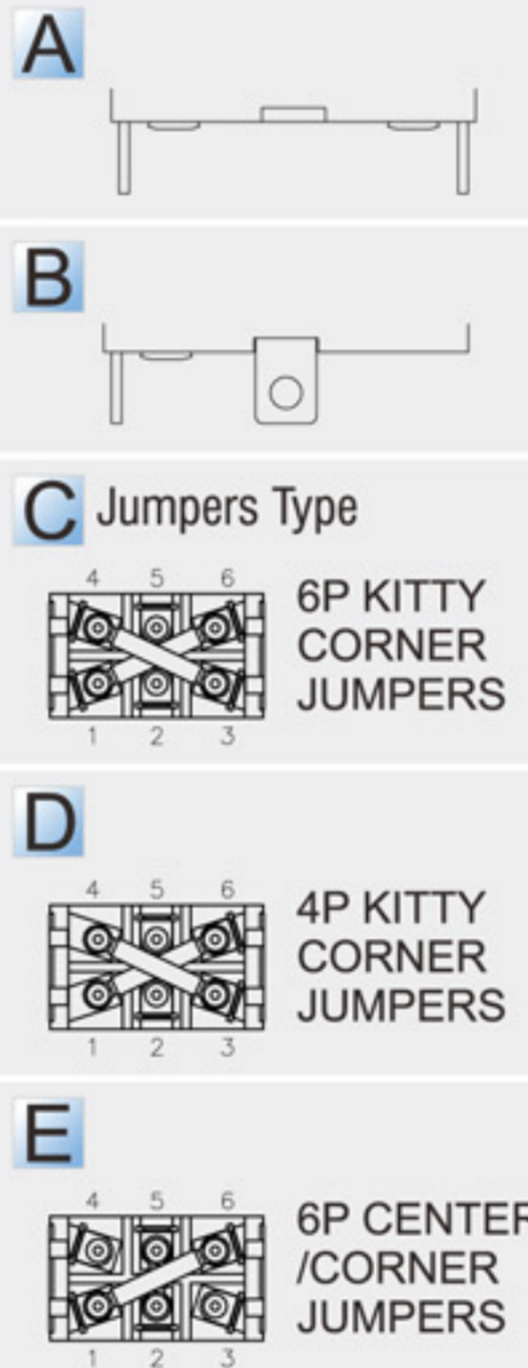

WATER SEALED

Y R13-438 for SQ(01),SAE SQ(04) wire(11) terminal

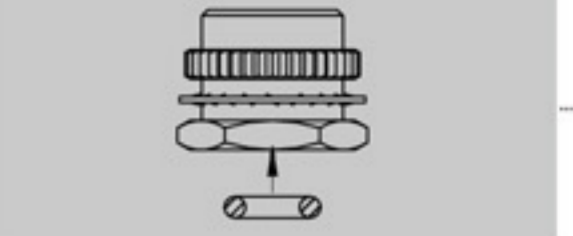

W Spring Washer

P ON/OFF Face Plate

Q HI/LO Face Plate

R Knurl Nut

H Hex Nut

K Black Knurl Nut

M Black Hex Nut

N Locating Ring

O O Ring

▶ Inside switch

L Locker Washer

T Rubber Boot(W-72)

U Body PVC-Coating

V Paper Ring

X Black Ring Nut

Y Rubber Ring

Z Black Face Nut

NONE

\*INSIDE ( ) IS BULK PACKED



RATING

0 21A 14V DC

LEVER

1 Standard Type

4 Short Type

2 Ball Type

5 80M Paddle

3 Long Type

6 Flat Plastic